




# FLEX-TAC-LIGHT

## TACTICAL LIGHTING SERIES

- › Entirely Remote Controlled System
- › Powerfull LED Lighting
- › Aiming for Visual Target
- › Laser Sight for Position Alignment
- › Deployment Quick and Safely

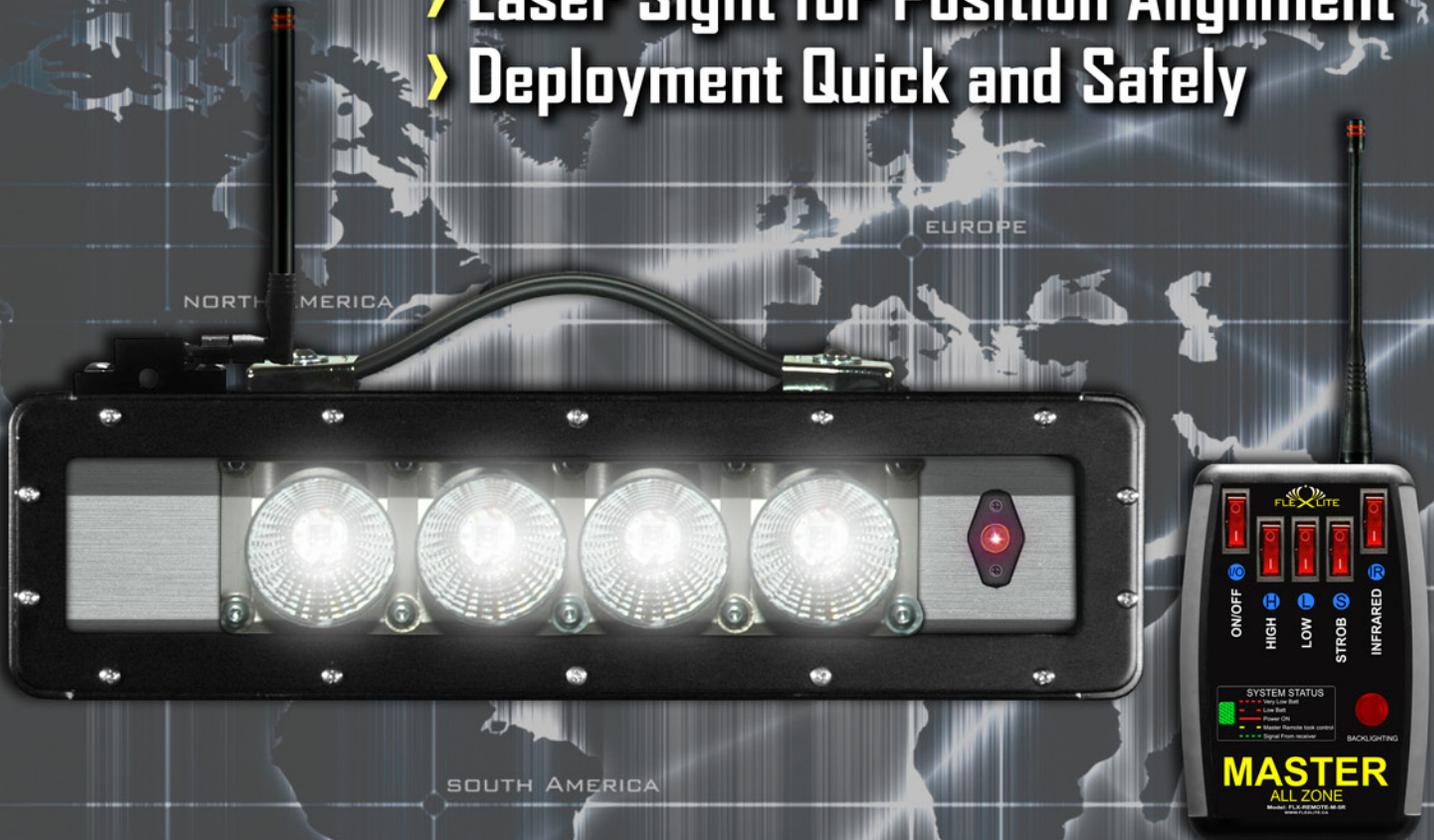

**FLX-TAC4VLRRC**

- Completely wireless and battery powered system
- Built-in long life Li-ion batteries
- Bidirectional remote control
- Optional master remote control for multi zone deployment
- Weather resistant



# TACTICAL LIGHTING SERIES

## FLX-TAC4VLRRRC

### OUR MOST COMPACT TACTICAL REMOTE CONTROLLED LED LIGHTING SYSTEM

The powerful 5000 lumen lighting provided by each projector can quickly and safely floodlight the entire work area as soon as the response teams arrive. With its great autonomy, the system does not require any other generator or external power source, thus avoiding the presence of cumbersome wires on the ground inside the security perimeter. The purpose of this system is to reduce the time required to deploy lighting equipment and to make the work of the field staff easier as well as to enhance their security.

Each unit is easily operated via wireless remote control, making it possible to control it from a safe hidden location. Whether it is used for surveillance or tactical operations, this system has the capabilities to support a multitude of operations and to increase the mission performance by extending operational options.

The tactical support comes with each unit has a hook closure and stability claws ensuring a stable deployment in all circumstances. Compact and lightweight, the system is easily transportable on the back with the optional backpack harness.

The 1/4" thick aluminum construction gives the system outstanding strength.

#### SPECIFICATIONS

##### LIGHTING

Power .....	5000 Lumens
Projection angle .....	2 x 25° + 2 x 45°
Color temperature .....	5 000°K
Positioning laser .....	Yes (1 mW)
Laser wavelength .....	650 nm

##### BATTERY LIFE AT 21°C

Economy mode .....	9 hours (only 2 LED)
Full mode .....	4.5 hours (all LED)
Charging time .....	6 hours (5 amps charger)

##### REMOTE CONTROL

Range .....	500 feet
Bidirectional .....	Yes, with status indicator
Battery .....	1 x 9 Volts

##### HOUSING

Height .....	4.25 inch (10.8 cm)
Depth .....	4.75 inch (12 cm)
Width .....	15 pouces (39 cm)
Material .....	Black anodized aluminum
Weight .....	12 lbs (5.4 Kg)
Protection IP Code .....	IP65
Operating temperature .....	-40°C à 50°C (-40°F à 122°F)

##### SUPPORT (TACTICAL INCLUDED)

Tripod material .....	Black painted steel
Maximum extension .....	6 feet (182 cm)
Maximum legs spacing .....	42 inch (106 cm)
Fence hook .....	Integrated
Stability claws .....	Integrated
Compatible with Manfrotto tripod .....	With adapter SA-FLXSPOT-MFRTADAP

##### ACCESSORIES

Adapter for 120VAC auxiliary source .....	SA-FLXSPOT-110VADAP
Adapter for 12VDC auxiliary source .....	SA-FLXSPOT-12VADAP
Tactical tripod set .....	FLXSTAND6-TAC
Carrying Bag .....	T-BAGFLX8.5X42X5.25
Manfrotto tripod adapter .....	SA-FLXSPOT-MFRTADAP
Back transportation harness .....	FLX-HTP
Multi-zone remote control .....	FLX-REMOTE-MASTER

